

Datasheet of Trimming Potentiometer

3386T-1-LS10K

★Electrical Characteristics

Range of normal resistance: $10K\Omega$
Resistance tolerance: $\pm 10\%$
Terminal resistance: $\leq 1\%R$ or 2Ω
Contact resistance variation: $CRV \leq 1\%R$ or 2Ω
Withstand Voltage: 101.3kPa 500V, 8.5kPa 350V
Insulation resistance: $R1 \geq 1G\Omega$ (100Vac)
Effective electrical travel: 260°

★Environment Characteristics



Rated Power (250 max): 0.5W $70^\circ C$, 0W $125^\circ C$
Temperature range: $-55^\circ C \sim +125^\circ C$
TCR: $\pm 100\text{ppm}/^\circ C$, $\pm 250\text{ppm}/^\circ C$
Temperature variation: $\Delta R \leq \pm(2\%R + 0.1\Omega)$, $\Delta(Uab/Uac) \leq \pm 1\%R$
Collision: 390m/S₂, 4000cycles $\Delta R \leq \pm 1\%R$
Electrical endurance at $70^\circ C$: 0.5W, 1000h $\Delta R \leq \pm 10\%R$ $\Delta(Uab/Uac) \leq 10\%$
Mechanical Endurance: 200 cycles, $\Delta R \leq \pm 10\%R$
Steady damp-heat: $\Delta R \leq \pm 3\%R$, $R1 \geq 100M\Omega$

★Physical Characteristics

Total Mechanical Travel: 280° Starting Torque: $\leq 20\text{mN.m}$ Clutch
Torque: $\geq 50\text{mN.m}$
*T = see pinout diagram on next page
*LS = Long shaft

Drawing

Common Dimensions Top Adjust

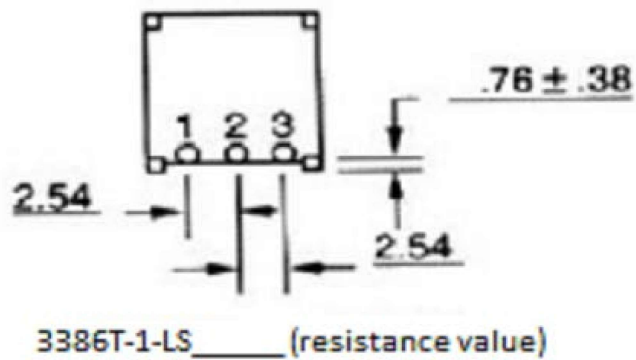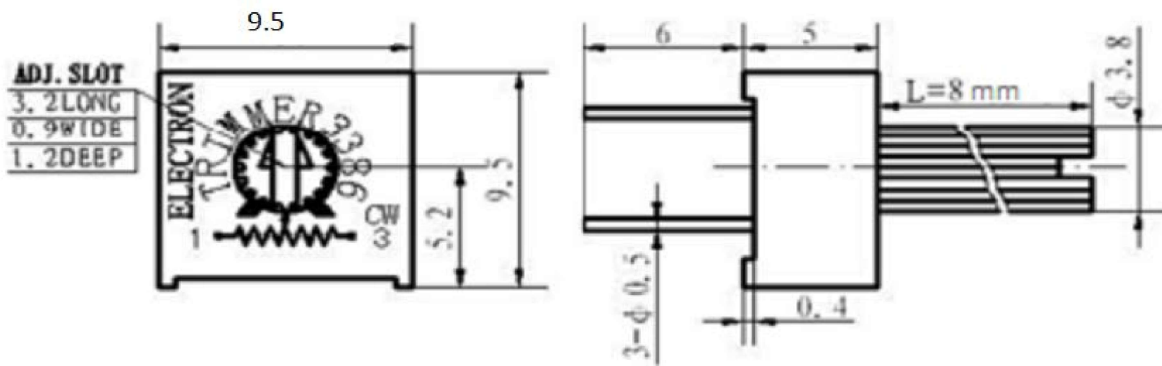

T = Above pinout diagram
LS = Long shaft (0.315" / 8 mm)